

GREEN LUX 65

CATALANO
THE ESSENCE OF CERAMICS



Installazione ad appoggio o semincasso. senza troppopieno



Suitable for sit on, under the countertop.

Without overflow.

Installation aufliegend oder halbeingebaut.

Ohne Überlaufschutz.

EN 14688 – CL00

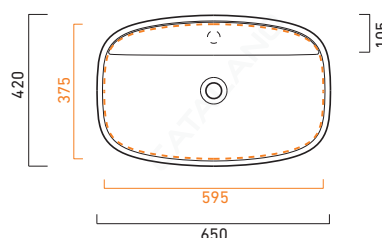

☐ Bianco lucido
cod. 165GRLX00

☐ Bianco satinato
cod. 165GRLXBM

☐ Grigio satinato
cod. 165GRLXGS

☐ Azzurro satinato
cod. 165GRLXAS

☐ Verde satinato
cod. 165GRLXVS

