


# TIME

## Male shower thermostatic with column

# GRB mixers®

Chrome - 47 425 470 XL

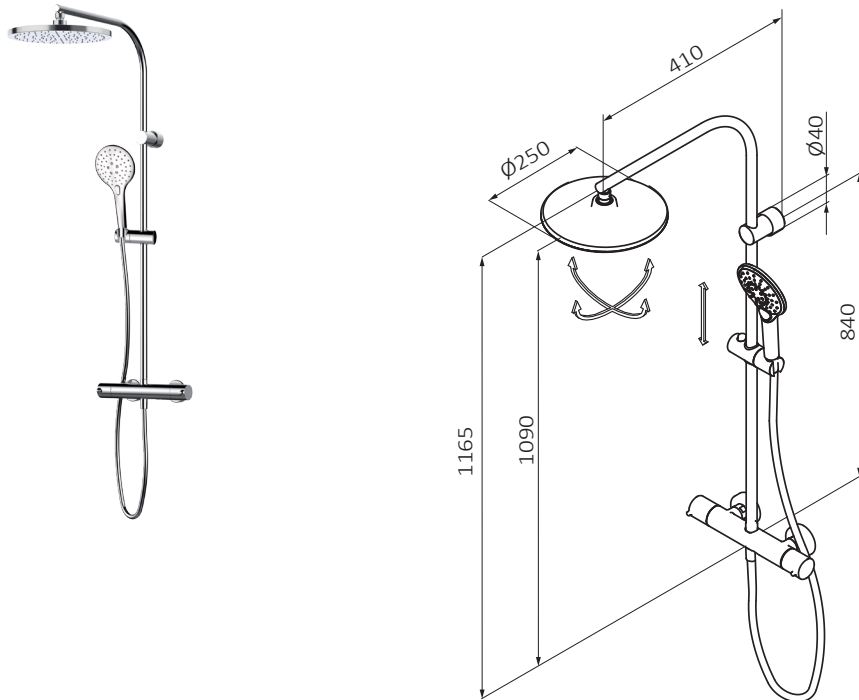

1

COLLECTION: **TIME** PRODUCT: **Male shower thermostatic with column**

FINISH: **Chrome** CODE: **47 425 470 XL** EAN 13: **8435200089463**

**PACKAGED PRODUCT INFORMATION:** WEIGHT: **6.452 kg** WIDTH: **31 cm** LONG: **19 cm** HIGH: **77 cm**

**LINK ASSEMBLY INSTRUCTIONS:** [http://d7rh5s3nxmpy4.cloudfront.net/CMP2592/files/040801\\_02\\_MAIL\\_Instrucciones\\_Columnas\\_Fijas\\_y\\_TL.pdf](http://d7rh5s3nxmpy4.cloudfront.net/CMP2592/files/040801_02_MAIL_Instrucciones_Columnas_Fijas_y_TL.pdf)

### TECHNICAL SPECIFICATIONS:

- › RECOMMENDED PRESSURE: 1 to 5 bars
- › MAXIMUM PRESSURE OF USE: 10 bars
- › INLETS: (H) G 3/4"
- › OUTLETS: G 1/2"
- › Diverter: In left flow handle
- › Cartridge Thermostatic
- › With eccentric of  $\pm 20$  mm
- › Sensitivity and acoustics according to the norm EN ISO 3822
- › Snow showerhead Orientable 3F  $\varnothing 250$  mm ABS- Flow to 3 bar opening max.: 8.5 l/min
- › Snow hand-shower 4F  $\varnothing 125$  mm ABS- Flow to 3 bar opening max.: 11 l/min
- › Extendable column (+20 cm) with: 05070002

### MATERIAL SPECIFICATIONS:

- › Machined brass bodies
- › Coating in Ni-Cr electrolytic bath
- › Metallic handle

### USE SPECIFICATIONS:

- › GRB Live Technology, constant temperature. Valid for all hot water supplies
- › Without minimum pressure and without calibration
- › Anti-liming and self-calibrated metallic cartridge, certificated by Aenor
- › Stop safety button at 38°C
- › Adjustable support
- › Column with full use of height (75 mm only from the showerhead and the ceiling)

### SPARE PARTS LIST:

- › 00010121: Time Male column flow handle
- › 00010023: Time Male temperature handle
- › 00450001: Thermostatic cartridge + Time Male handle
- › 040089: Diverter cartridge 2 ways
- › 090057: Eccentric thermostatics set-plates-joints